



Camshelving® Elements Series

Single Shelf Kits for Stationary Units Shelf Kits with Camguard® Antimicrobial

4 Shelf Widths

14" (360 mm), 18" (460 mm),
21" (540 mm), 24" (610 mm)

4 Shelf Lengths

54" (1380 mm), 60" (1530 mm),
72" (1220 mm), 78" (1980 mm)



• Shelf Kit includes:

Two Stationary Traverses, 8 Stationary Dovetails (4 ea. A & B),
Vented or Solid Shelf Plates to complete one shelf.

Features & Benefits

Strong Technology

Posts and Traverses are built using advanced manufacturing technology and the use of a non-corrosive composite material. The robust design along with unique composite material gives Elements an unprecedented longevity, durability and weight-bearing capacity in the industry. Shelves up 48" (1220 mm) long hold up to 800 lbs. (363 kg) evenly distributed static weight. Shelves 54" – 78" (1380 – 1980 mm) long hold up to 600 lbs. (272 kg) each. Shelves connected by Corner Connectors hold up to 400 lbs. (182 kg) on a 36" (910 mm) to 48" (1220 mm) traverse.

Hygienic Design

Camshelving Shelf Plates contain Camguard® antimicrobial, a silver-ion technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation. Camguard is incorporated throughout the shelf plate material so that it will never wash off or wear out. The shelf plates remove easily and can be placed in an open end Camrack® (OETR314) for washing.

Shelving for Life

Non-corrosive design will endure all areas of operation – dry-storage, coolers, warewashing, freezer and heavy condensation and humidity settings – without risk of rusting, peeling, denting, cracking or warping. Functions in temperatures down to -36°F (-30°C) or warm environments up to 190°F (88°C).

Fits in Any Space

Innovative design helps maximize valuable space and provides strength and stability. Straight line components are attached by sharing posts of existing units with no loss of weight-bearing capacity. Corner Connectors bring units together in 90° angle to create corner & U-shaped units. Reduces costs by sharing posts of existing unit without the use of add-on clips or "S" hooks.

Requires Minimal Assembly

Can be put together with the use of a rubber mallet. Two-piece dovetails secure Traverses so they can be set easily into place.

Item No. _____


Specifier Identification No. _____

Model No. _____

Quantity _____



Four Shelf Unit with Vented Shelf Plates.

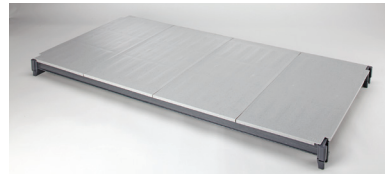

Solid Shelf Kit includes two Traverses and Solid Shelf Set for one shelf.



Vented Shelf Kit includes two Traverses and Vented Shelf Set for one shelf.

[Click here to buy now!](#)



1-866-285-1252

Flexible Design

Shelves can be easily adjusted at 4" (102 mm) increments. Add a shelf to an existing unit by simply ordering the appropriate Shelf Kit. Adjustable foot on bottom of each stationary Post adjusts easily for floor irregularities so shelf contents are securely stored and leveled.

Optional Accessories

Wall Fastener and Seismic Foot. Each are packed 4 per case. Identification Tags clip easily onto traverses.

Approvals



Components

* Does not include Wall Fastener and Seismic Foot.



Camshelving® Elements Series

Single Shelf Kits for Stationary Units Shelf Kits with Camguard® Antimicrobial

Stationary – Shelf Kits with Vented Shelf Plates

CODE	WIDTH IN. MM	LENGTH IN. MM	CASE LBS. (CUBE)	CASE KG. (CUBE M)
54" (1380 mm) Traverses				
ESK1454V	14" 360 mm	54" 1380 mm	11.55 (2.49)	5,24 (0,07)
ESK1854V	18" 460 mm	54" 1380 mm	12.94 (2.49)	5,87 (0,07)
ESK2154V	21" 540 mm	54" 1380 mm	14.46 (2.49)	6,56 (0,07)
ESK2454V	24" 610 mm	54" 1380 mm	15.88 (2.49)	7,20 (0,07)
60" (1530 mm) Traverses				
ESK1460V	14" 360 mm	60" 1530 mm	13.01 (2.77)	5,90 (0,08)
ESK1860V	18" 460 mm	60" 1530 mm	14.62 (2.77)	6,63 (0,08)
ESK2160V	21" 540 mm	60" 1530 mm	16.34 (2.77)	7,41 (0,08)
ESK2460V	24" 610 mm	60" 1530 mm	17.88 (2.77)	8,11 (0,08)
72" (1830 mm) Traverses				
ESK1472V	14" 360 mm	72" 1830 mm	14.95 (3.31)	6,78 (0,09)
ESK1872V	18" 460 mm	72" 1830 mm	16.85 (3.31)	7,64 (0,09)
ESK2172V	21" 540 mm	72" 1830 mm	18.91 (3.31)	8,58 (0,09)
ESK2472V	24" 610 mm	72" 1830 mm	20.93 (3.31)	9,49 (0,09)
78" (1980 mm) Traverses				
ESK1478V	14" 360 mm	78" 1980 mm	15.89 (3.60)	7,21 (0,10)
ESK1878V	18" 460 mm	78" 1980 mm	17.79 (3.60)	8,07 (0,10)
ESK2178V	21" 540 mm	78" 1980 mm	19.85 (3.60)	9,00 (0,10)
ESK2478V	24" 610 mm	78" 1980 mm	21.87 (3.60)	9,92 (0,10)

Corner Connector Set

CODE	DESCRIPTION	CASE LBS. (CUBE)	CASE KG. (CUBE M ³)
ECC	Right and Left	0.70 (0.04)	0,32 (0,001)

Case Pack: 1 set

Architect Specs

Posts:	Proprietary non-corrosive composite material.
Post Connectors:	Glass Filled Polypropylene.
Traverses:	Proprietary non-corrosive composite material.
Vented/Solid Shelf Plates:	Reinforced polypropylene with Camguard® antimicrobial.
Corner Connectors:	Glass Filled Polypropylene.
Adjustable Foot:	Glass Filled Nylon.
Seismic Foot:	Stainless Steel post and wide foot plate, 3 holes for bolts. (Bolts not provided)
Divider Bars:	Glass Filled Nylon.
Wall Fastener:	Stainless Steel.
Dovetails:	Resin Nylon.
Wedges:	Resin Polypropylene.

Item No. _____

Specifier Identification No. _____

Model No. _____

Quantity _____

Stationary – Shelf Kits with Solid Shelf Plates

CODE	WIDTH IN. MM	LENGTH IN. MM	CASE LBS. (CUBE)	CASE KG. (CUBE M)
54" (1380 mm) Traverses				
ESK1454S	14" 360 mm	54" 1380 mm	12.15 (2.49)	5,51 (0,07)
ESK1854S	18" 460 mm	54" 1380 mm	13.74 (2.49)	6,23 (0,07)
ESK2154S	21" 540 mm	54" 1380 mm	15.77 (2.49)	7,15 (0,07)
ESK2454S	24" 610 mm	54" 1380 mm	17.10 (2.49)	7,75 (0,07)
60" (1530 mm) Traverses				
ESK1460S	14" 360 mm	60" 1530 mm	13.66 (2.77)	6,20 (0,08)
ESK1860S	18" 460 mm	60" 1530 mm	15.58 (2.77)	7,07 (0,08)
ESK2160S	21" 540 mm	60" 1530 mm	17.70 (2.77)	8,03 (0,08)
ESK2460S	24" 610 mm	60" 1530 mm	19.16 (2.77)	8,69 (0,08)
72" (1830 mm) Traverses				
ESK1472S	14" 360 mm	72" 1830 mm	15.79 (3.31)	7,16 (0,09)
ESK1872S	18" 460 mm	72" 1830 mm	17.98 (3.31)	8,16 (0,09)
ESK2172S	21" 540 mm	72" 1830 mm	20.61 (3.31)	9,35 (0,09)
ESK2472S	24" 610 mm	72" 1830 mm	22.51 (3.31)	10,21 (0,09)
78" (1980 mm) Traverses				
ESK1478S	14" 360 mm	78" 1980 mm	16.73 (3.60)	7,59 (0,10)
ESK1878S	18" 460 mm	78" 1980 mm	18.92 (3.60)	8,58 (0,10)
ESK2178S	21" 540 mm	78" 1980 mm	21.55 (3.60)	9,78 (0,10)
ESK2478S	24" 610 mm	78" 1980 mm	23.45 (3.60)	10,64 (0,10)

Optional Accessories

Seismic Foot (Bolts not provided)	<input type="checkbox"/> CSEQ3	Color: Silver	Case pack: 4 each
Wall Fastener	<input type="checkbox"/> CSWF	Color: Silver	Case pack: 4 each
Identification Tag 6"	<input type="checkbox"/> CSID	Color: White/Clear	Case pack: 12 each
Identification Tag 3"	<input type="checkbox"/> CSID3	Color: White/Clear	Case pack: 12 each

Standard Color

Brushed Graphite (580)

Approvals



* Does not include Wall Fastener and Seismic Foot.

CAMBRO®

© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, CA 92647-2056, U.S.A.
Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service Department 800 833 3003