





Item# _____

Job _____

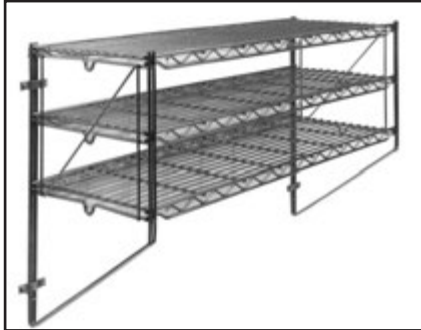

REGULAR ERECTA SHELF® SHELVING ACCESSORIES

- **Wall Mounts:** Used to create wall-mounted shelving units with 12" or 18" (305 or 460mm) regular Erecta Shelf® shelves of any length. Models are available to accommodate from one to five shelves. Each mount consists of shelf support and mounting brackets. Wall bolts or screws not included; they must be selected according to type of wall. Order shelves from sheet #10.50.

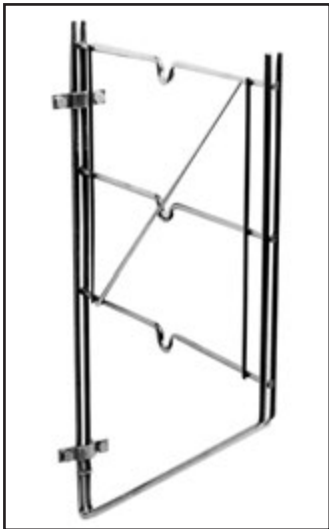


DIMENSIONS:

	Width	Height				Approx. Pkd.
	(in.)	(mm)	(in.)	(mm)	Capacity	Wt. (Pr.)
						(lbs.) (kg)
12	305	10 ³ / ₄	273	1 shelf	12WB1C	2 ¹ / ₂ 1
12	305	20 ¹³ / ₁₆	529	1 to 3 shelves	12WB3C	5 2
12	305	30 ¹³ / ₁₆	783	1 to 5 shelves	12WB5C	7 ¹ / ₄ 3 ¹ / ₄
18	460	11 ³ / ₄	298	1 shelf	18WB1C	3 1 ¹ / ₂
18	460	21 ⁵ / ₈	549	1 to 3 shelves	18WB3C	6 2 ³ / ₄
18	460	31 ⁵ / ₈	803	1 to 5 shelves	18WB5C	8 ¹ / ₂ 4

For additional mounting brackets (single) order **Cat. No. 9975C**

Double mounting brackets are also available for use where continuous wall shelving is to be installed. **Cat. No. 9976C**

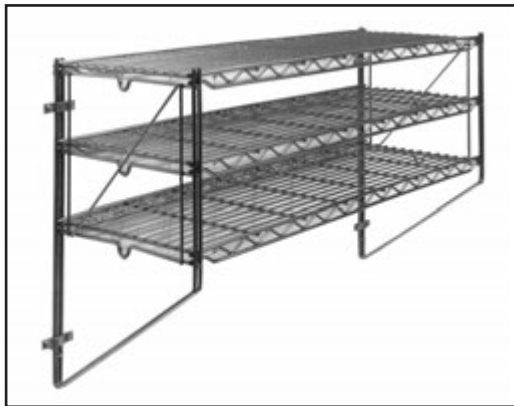

- **Wall Kit:** Kit includes two shelves, shelf supports, and mounting brackets. Wall bolts and screws not included; they must be selected according to type of wall.

Cat. No.	Shelf Length		Overall Length		Shelf Width		Overall Width		Overall Height		Approx. Pkd. Wt	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)
12WS12C	24	610	26 ¹ / ₄	670	12	305	13	330	21	530	18 ¹ / ₂	8 ¹ / ₂
12WS32C	36	910	38 ¹ / ₄	970	12	305	13	330	21	530	25 ¹ / ₄	11 ¹ / ₂
12WS52C	48	1220	50 ¹ / ₄	1275	12	305	13	330	21	530	32	14 ³ / ₄

Kit packaged in one box and UPS shippable



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



REGULAR ERECTA SHELF® SHELVING ACCESSORIES



1" (25mm) Ledge

- **1" Shelf Ledges:** To prevent items from protruding or falling off shelves, ledges can be installed on the shelf edges.

In many cases a one-inch (25mm) ledge will serve the purpose, while allowing access to the shelf from all sides. When a higher ledge is needed, the four-inch (100mm) size can be used on the back or front of the shelf.

For enclosure of the entire back of a shelving unit, rods and tabs (below) can be attached.

DIMENSIONS:

1" (25mm) Back Ledges

Length		Cat. No. Chrome	Approx. Pkd. Wt	
(in.)	(mm)		Per 1/2 Doz. (lbs.)	(kg)
24	610	L24N-1C	6	2 ³ / ₄
30	760	L30N-1C	12	5 ¹ / ₂
36	910	L36N-1C	15	7
42	1060	L42N-1C	16 ¹ / ₂	7
48	1220	L48N-1C	21	9 ¹ / ₂
60	1525	L60N-1C	22 ¹ / ₂	10



- **Rods & Tabs:** Rods hook over wires of top shelf and are attached to each of the other shelves with spring-clip tab. Each rod requires one tab for each shelf except top self. Chrome.

DIMENSIONS:

Rods


Upright Height		Rod Length		Cat. No.	Approx. Pkd. Wt	
(in.)	(mm)	(in.)	(mm)		(lbs.)	(kg)
53 ¹ / ₂	1360	52	1320	R52C	1	¹ / ₂
63 ¹ / ₂	1610	61	1550	R61C	1	¹ / ₂
73 ¹ / ₂	1870	72	1830	R72C	1 ¹ / ₄	¹ / ₂
88 ¹ / ₂	2250	86	2185	R86C	1 ¹ / ₂	³ / ₄

Tabs

Rods are shipped with sufficient tabs for a 4-shelf unit. For additional tabs order:

Wire Shelf Tab – Cat. No. 9084Z

REGULAR ERECTA SHELF®
SHELVING ACCESSORIES

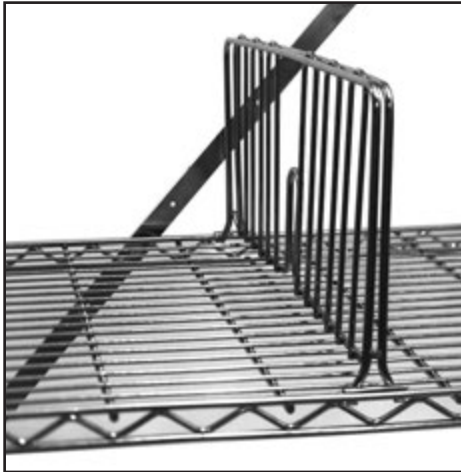

- **8" (203mm) Shelf Dividers:** Shelf dividers enable you to compartmentalize shelves, help keep shelf contents orderly. Because they snap into place, they can be positioned and repositioned to exact size of section needed. All models 8" (203mm) high.

Shelf Width		Cat. No. Chrome	Approx. Pkd. Wt.	
(in.)	(mm)		Per 1/2 Doz. (lbs.)	(kg)
12	305	DD12C	12	5 1/2
18	460	DD18C	13 1/2	6
24	610	DD24C	16 1/2	7 1/2

Rods and tabs can serve a similar purpose when entire unit is to be compartmentalized.



REGULAR ERECTA SHELF®
SHELVING ACCESSORIES



- **Shelf Spacers:** Where shelves are wanted at spacing other than 5" (127mm) increments, shelf spacers wedge into the upright channels to provide a solid support at the desired level. Spacers are used at outside corners, four per shelf.

	Cat. No.
Spacer	9988Z



- **Corner Brace:** When regular Erecta Shelf® units are to be joined at right angles, corner braces link shelf ends of one unit to shelf sides of the other, eliminating one upright and leaving the shelving corner open and fully usable. Two required per shelf.
Cat. No 9999Z



- **Upright Clamp:** Where regular Erecta Shelf® units are to be joined end-to-end, the upright clamp holds the adjacent uprights securely so that each unit buttresses the other.
Cat. No 9971Z



- **Foot Plate:** Replaces the leveling bolt. Used when units are to be bolted to the floor or, without bolts, when a broader foot is desired.
Cat. No 9993Z

Manufactured by:



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741 • Fax: 570-825-2852
For Product Information Call: 1-800-433-2232
Visit Our Web Site: www.metro.com

L02-029
Rev. 2/99
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.

