



MODEL 35AS Tube Fired Gas Fryer



STANDARD FEATURES

- Tank - stainless steel
- Cabinet – stainless steel front & door
- galvanized sides & back
- Battery Spark Ignitor
- Millivolt Thermostat
- High temperature safety limit switch
- Built-in integrated flue deflector
- 1.25" (32mm) full port drain valve
- Two twin fry baskets (regular mesh)
- Tube rack
- Drain extension
- Clean out rod
- Removable basket hanger
- 6" (152mm) adjustable legs



Project _____

Item No. _____

Quantity _____

STANDARD SPECIFICATIONS

BASICS

- 14" x 14" stainless tank
- 2.0" to 3.5" (5cm to 8cm) cook depth
- 40 to 45 lbs oil capacity (19 to 21 liters)
- Three tube/burner design with 4" burner* and 6" tube,
*CE & Australian version has 6" burners and 6" tubes

CONSTRUCTION

- Welded tank with extra smooth peen finish ensures easy cleaning.
- Long-lasting, high-temperature alloy stainless steel heat baffles are mounted in the heat exchanger tubes
- Standing pilot light design provides a ready flame when heat is required.
- Cabinet front and door are constructed of stainless steel with galvanized sides and back.

CONTROLS

- Thermostat maintains selected temperature automatically between 200°F and 400°F (93°C and 190°C).
- Integrated gas control valve acts as a manual and pilot valve, automatic pilot valve, gas filter, and automatic valve.
- Gas control valve prevents gas flow to the main burner until pilot is established and shuts off all gas flow automatically if the pilot flame goes out.
- High Temperature limit switch safely shuts off all gas flow if the oil temperature exceeds the upper limit.

OPERATIONS

- Battery Spark Ignitor makes lighting pilot quick and easy.
- Front 1.25" (32mm) NPT drain for quick draining.


AVAILABLE OPTIONS & ACCESSORIES (at additional cost)

- Fry basket alternatives (triple, single square, fine mesh, etc)
- Fry pot covers
- 6" (152mm) adjustable rear and front locking casters

MODEL 35AS Tube Fired Gas Fryer

MODEL 35AS Tube Fired Gas Fryer

MODEL 35AS Tube Fired Gas Fryer

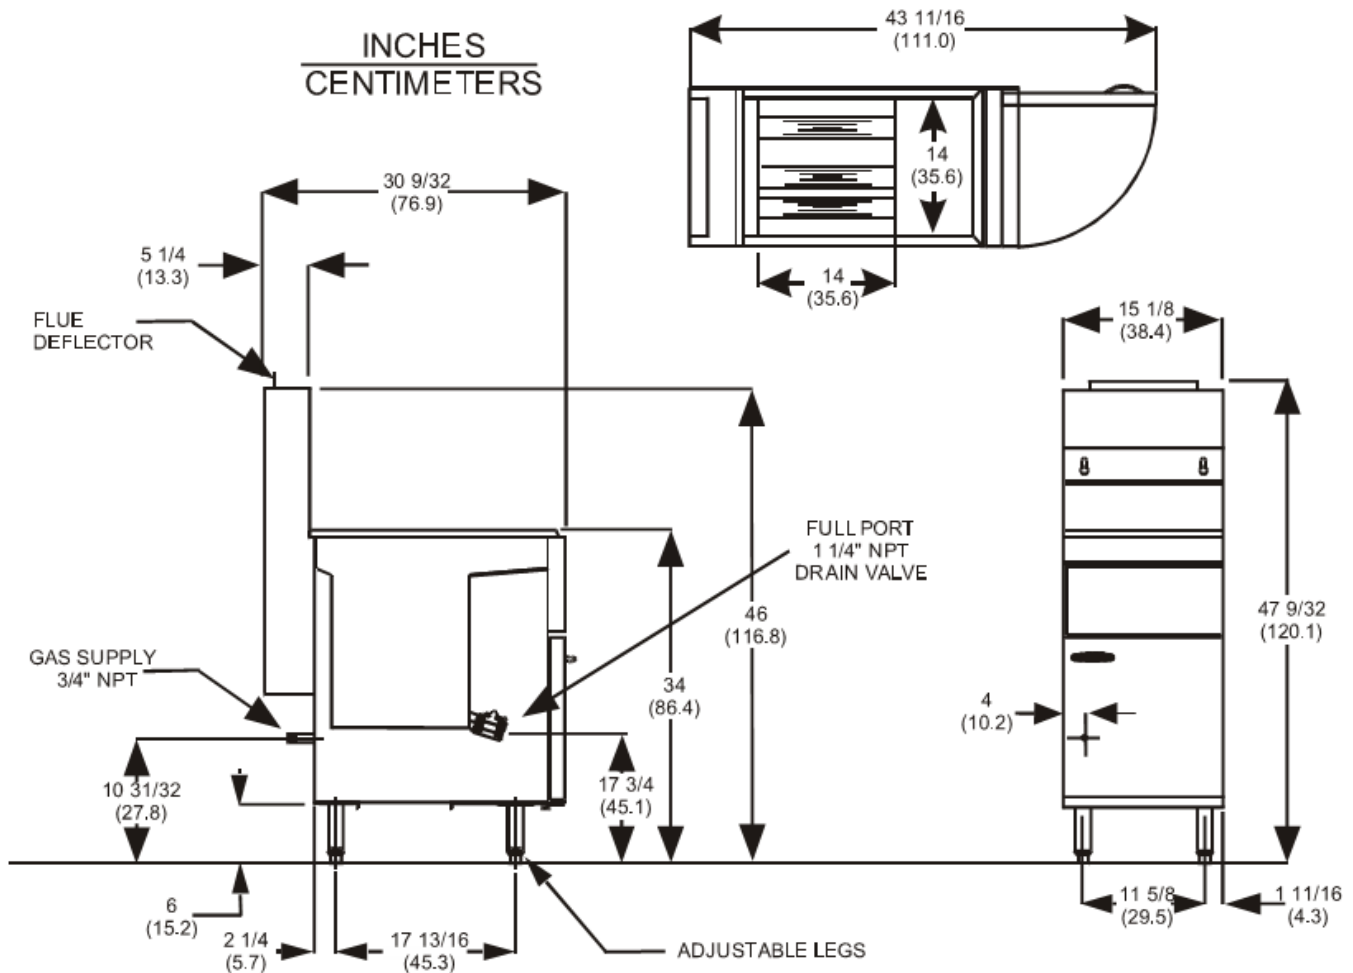

INDIVIDUAL FRYER SPECIFICATIONS						
Model	Frying Area	Cook Depth	Oil Capacity	Gas Input Rate / Hr	Burner Pressure Nat	Burner Pressure LP
35AS	14 x 14 in (35.6 x 35.6 cm)	2.0 - 3.5 in (5.0 - 8.0 cm)	40 - 45 Lbs (19 - 21 liters)	90,000 BTUs (26.3 kW) (95 MJ)	4" W.C. (10 mbars / 1 kPa)	10" W.C. (25 mbars / 2.4 kPa)
Model	Shipping Weight	Shipping Crate Size H x W x L		Shipping Cube		
35AS	161 Lbs (73 kg)	36 x 19 x 46 in (116.8 x 48.3 x 91.4 cm)		18.2 ft ³ (0.5 m ³)		

GAS SYSTEM REQUIREMENTS				Total Gas Load / Hr
Supply Pressure *	Natural Gas	LP Gas	Model 35AS	
	7 - 10" W.C. (17.4 mbars/ 1.74 kPa)	11 - 13" W.C. (27.4 mbars/ 2.74 kPa)	90,000 BTUs (26.3kW) (95 MJ)	

* Check plumbing / gas codes for proper gas supply line sizing to sustain burner pressure when all gas appliances are full on.

CLEARANCES						
Front min.	Floor min.	Combustible material		Non-Combustible material		Fryer Flue Area
		Sides min.	Rear min.	Sides min.	Rear min.	
30" (76.2 cm)	6" (15.25 cm)	6" (15.2 cm)	6" (15.2cm)	0"	0"	Do not block / restrict flue gases from flowing into hood or install vent hood drains over the flue.

Provide Anets 35AS tube-fired gas fryer. 90,000 btu/hr. Cook depth 2.0 - 3.5 in. Fryer shall have a blower free atmospheric burner system combined with three stainless steel tubes utilizing high temperature alloy stainless steel baffles, with thermostatic control, thermo-safety pilot and spark ignitor, separate gas shut off, 3/4" npt rear gas connection, recessed cabinet back, 1-1/4" Full port drain. Fryer shall have a deep cool zone; minimum 20% of total oil capacity. Fryer cooking area shall be 14" x 14". Provide accessories as follows: