

VULCAN**RRE SERIES
HEAVY DUTY ELECTRIC GRIDDLES**

Model RRE36D

**SPECIFICATIONS**

Heavy duty electric griddle, Vulcan Model No. _____. Stainless steel front and sides. 13" cooking height on 4" adjustable legs. 0.59" (15mm) composite griddle plate with stainless steel cooking surface. Tubular incoloy elements and one snap action thermostat for every 12" of griddle width. Thermostats adjust from 200° to 450° F. Stainless steel 3" back and tapered side splashes. 3 $\frac{1}{8}$ " wide front grease trough empties into large capacity grease drawer. Available in 208V, 240V 50/60 Hz, 1 or 3 phase. 480V 50/60 Hz 3 phase.

NSF listed. UL listed. UL listed to Canadian safety standards.

SPECIFY VOLTAGE WHEN ORDERING.

- RRE24D** 24" w x 24" d griddle plate
- RRE36D** 36" w x 24" d griddle plate
- RRE48D** 48" w x 24" d griddle plate

STANDARD FEATURES

- Stainless steel front, sides and 4" adjustable legs.
- 13" cooking height on 4" adjustable legs.
- 0.59" (15mm) composite griddle plate.
- Stainless steel cooking surface.
- Two tubular incoloy heating elements, one snap action thermostat and cycling light per each 12" griddle width. Thermostats adjust from 200° to 450° F.
- Stainless steel 3" back and tapered side splashes.
- 3 $\frac{1}{8}$ " wide front grease trough and a large capacity grease drawer.
- Available in 208V or 240V, 50/60Hz, 1 or 3 phase power supply. 480V, 50/60Hz, 3 phase power supply.
- One year limited parts and labor warranty.

OPTIONS

- Stainless steel stand with marine edges and casters.

Find this product at:

Central
RESTAURANT PRODUCTS

1-866-285-1252

VULCAN

a division of ITW Food Equipment Group LLC


P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602




RRE SERIES
HEAVY DUTY ELECTRIC GRIDDLES

ELECTRICAL CHARACTERISTICS


STANDARD VOLTAGES – 208 VOLTS OR 240 VOLTS 50/60 Hz. – SINGLE OR THREE PHASE 480 VOLTS 50/60 Hz. – THREE PHASE ONLY																
MODEL NO.	TOTAL CONN. KW	TOTAL KW PER CONN	3 PHASE LOADING KW PER PHASE PER CONN.			NOMINAL AMPS PER LINE WIRE CONN.										
						3 PHASE						1 PHASE				
			X-Y	Y-Z	X-Z	208 VOLT			240 VOLT			480 VOLT			208	240
			X	Y	Z	X	Y	Z	X	Y	Z	VOLT	VOLT			
RRE24D	10.8	10.8	5.4	5.4	0.0	22.5	45.0	22.5	19.5	39.0	19.5	9.7	19.5	9.7	51.9	45.0
RRE36D	16.2	16.2	5.4	5.4	5.4	45.0	45.0	45.0	39.0	39.0	39.0	19.5	19.5	19.5	77.9	67.5
RRE48D	21.6	21.6	10.8	5.4	5.4	67.4	67.4	45.0	58.5	58.5	39.0	29.2	29.2	19.5	103.8	90.0

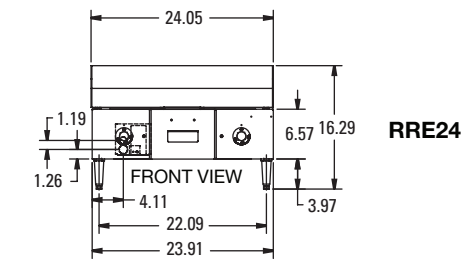


RRE24




ELECTRICAL KNOCKOUTS RRE24



SIDE VIEW ALL SIZES

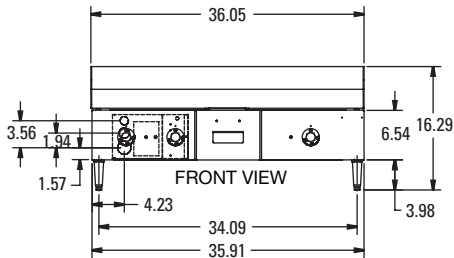


RRE36



ELECTRICAL KNOCKOUTS RRE36 AND RRE48

NOTE:
1.09, 1.38 & 1.75 Ø KNOCKOUTS IN BACK AND BOTTOM FOR CONDUIT ENTRANCE

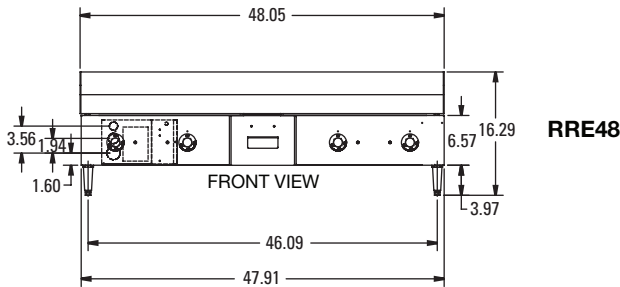

RRE48

MODEL NO.	OVERALL DIMENSIONS			COOKING SURFACE DEPTH	GREASE DRAWER CAPACITY (Gals.)	APPROX. SHIP WT.
	WIDTH	DEPTH	HEIGHT*			
RRE24D	24" (610)	27 ⁵ / ₈ " (702)	16 ³ / ₈ " (415)	24" (610)	1.5	160 lbs / 73 kg
RRE36D	36" (914)					215 lbs / 98 kg
RRE48D	48" (1219)					275 lbs / 125 kg

(Dimensions in parenthesis are in millimeters)

INSTALLATION CLEARANCES: Sides and rear must be 1" from nearest combustible construction and 0" from non-combustible construction. Bottom must be 4" from combustible or non-combustible construction. This appliance is manufactured for commercial installation only and is not intended for home use.

*These are nominal dimensions and can vary by +0.62" with adjustable legs.



a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

NOTE: In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.