

UNDERCOUNTER REFRIGERATORS

Model: 69K-050HC 69K-051HC 69K-109HC



69K-050HC



69K-051HC



69K-109HC

Central Undercounter Refrigerators are designed for optimal performance, durability and reliability. Three space efficient sizes ensure your application storage requirements can be cost-effectively satisfied.

FEATURES

- Easy to grip recessed drawer handles
- 3" casters are standard
- Adjustable shelves (one (1) per section/door)
- Available in multiple sizes to suit your needs
- Large LED temperature display is easily visible from up to 15 feet away

TEMPERATURE

- Holding temperature: 34° to 41°F (1° to 5°C)
- Forced-air refrigeration delivers consistent temperature regulation
- Solid-state controls deliver consistent, easily adjustable temperature performance
- Automatic defrost system maintains the ideal storage conditions at all times

CONSTRUCTION


- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Painted Aluminum
- Urethane insulated walls and doors
- Heavy duty epoxy coated shelves

REFRIGERANT

Environmentally-friendly R600a propane

ELECTRIC

120/60Hz/1 Ph (NEMA 5-15)



NEMA 5-15P



Intertek
Conforms to
ANSI-NSF 7



Intertek
Conforms to
ANSI UL 471



Environmentally
Friendly



DOE 2017
Compliant

WARRANTY (USA / CANADA)


Three (3) year parts and on-site labor
Five (5) year compressor
Administered by Central, 800-289-3637

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Central Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

UNDERCOUNTER REFRIGERATORS

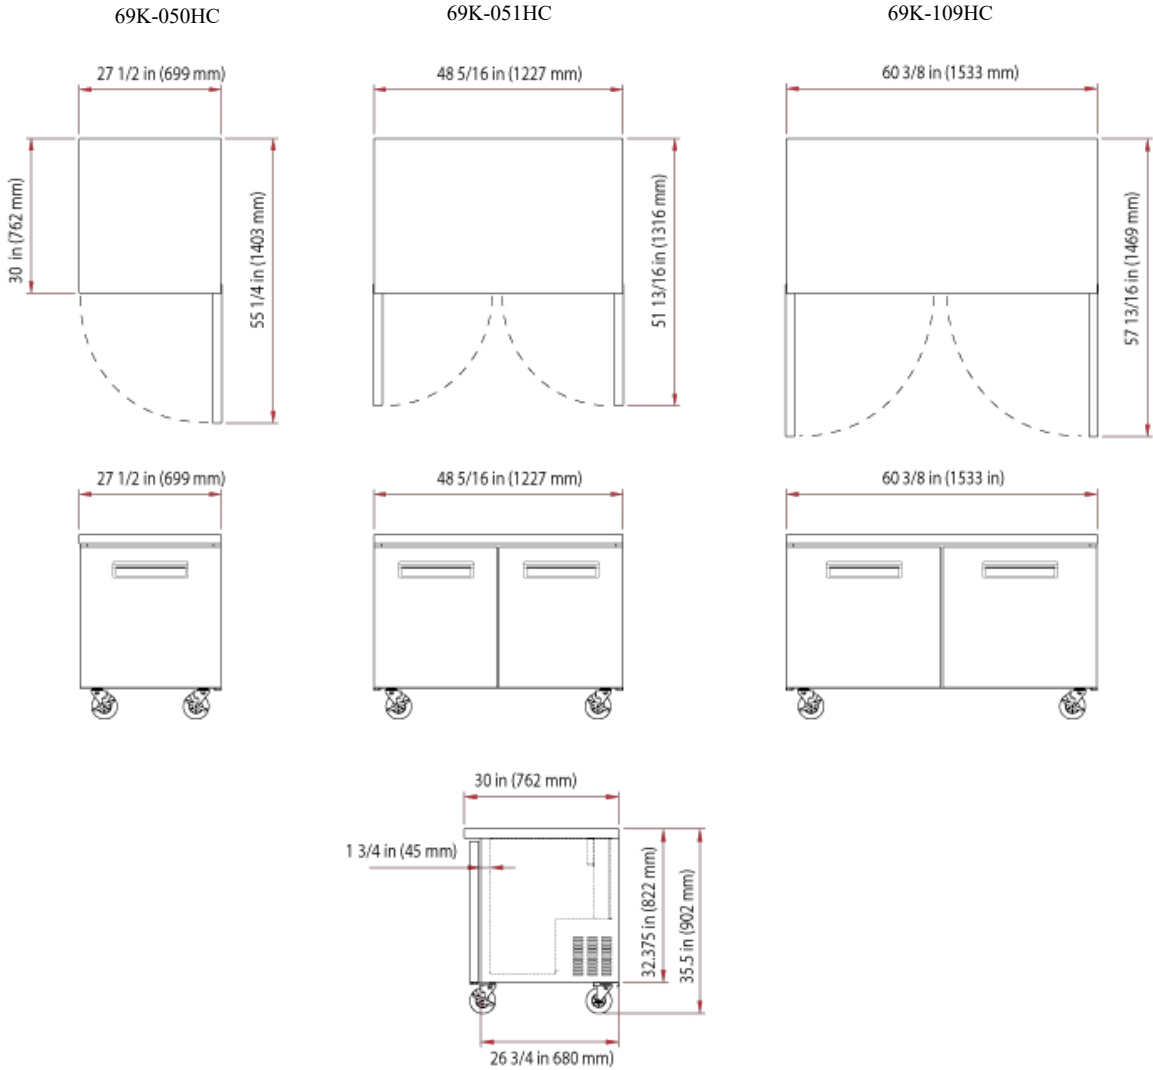

	External Dimensions in / mm	Internal Dimensions in / mm	Capacity	Temperature Range	Voltage	Max Amp Draw	Shelves	R600a Charge Size	Unit Weight	Shipping Weight
69K-050HC	27.5 x 30 x 35.5 699 x 762 x 902	22.9 x 18.8 x 24.5 581 x 478 x 622	6.5 Cu Ft 184 L	34° to 40°F 2° to 5° C	120V/60Hz	5	1	2.47 oz	181 lb 82 kg	220 lb 100kg
69K-051HC	48.3125 x 30 x 35.5 1227 x 762 x 902	43.5 x 18.8 x 24.5 1104 x 478 x 622	12 Cu Ft 340 L	34° to 40°F 2° to 5° C	120V/60Hz	5	2	2.65 oz	256 lb 116 kg	304 lb 140 kg
69K-109HC	60.375 x 30 x 35.5 1533 x 762 x 902	56.2 x 18.8 x 24.5 1428 x 478 x 622	15.5 Cu Ft 439 L	34° to 40°F 2° to 5° C	120V/60Hz	5	2	2.82 oz	305 lb 138 kg	352 lb 160 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.