

Model: _____

Item #: _____ Quantity: _____

Project: _____



(18-24-7 shown)

1800 or 2100 Series Available
(see reverse)

Accessories



- Standard Single Tier Keyhole Speedrail (available sizes: 24", 30", 36", and 48")
- Standard Double Tier Keyhole Speedrail (available sizes: 24", 30" and 36")
- Upgrade to Eight Circuit Cold Plate
- Stainless Steel Divider (specify ice bin model)
- Perforated bottom (on units without cold plates)
- Stainless Steel Sliding Cover (specify ice bin model and if bottle holders are bring used)
- Condiment Tray
- 3-Well Bottle Holder (two included with all ice bins)
- Stainless Steel Legs (upgrade)
- Bottle Wells

- **Interior:**
20 gauge stainless steel with 3/8" radius corners welded and sealed. Available in 12" and 15" depth.
- **Cold Plate:**
Cast aluminum post mix plate with seven circuits. Plate is sealed into bottom. Each circuit is 5/16" OD stainless steel tubing. Two full with remainder to be half curcuits. Bump and swedge fittings on ends.
- **Front Apron:**
22 gauge stainless steel clad over 20 gauge galvanized.
- **Backsplash:**
22 gauge stainless steel.
- **Sides:**
20 gauge stainless steel.
- **Back and Bottom:**
20 gauge galvanized.
- **Legs:**
1-5/8" tubular 16 gauge galvanized steel. Each leg to have grey plastic bullet foot.
- **Plumbing:**
1/2" IPS drain connection with cold plate (4" nipple provided).
1" IPS drain connection without cold plate.

Approved By: _____



Model: _____ Item #: _____ Quantity: _____ Project: _____

1800 Series

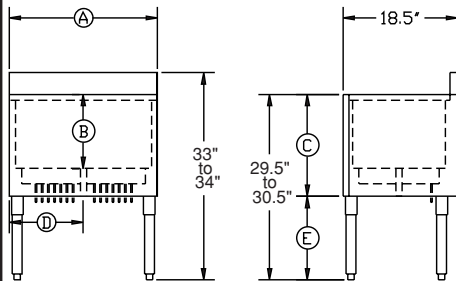

Model Numbers	Length (A)	Bin Depth (B)	Overall Depth (C)	Left Side to Drain (D)	Inside Bin. Dim.	Cold Plate Circuits	Ice Capacity lbs	Leg Size (E)	Weight lbs
18-24	2'-0"	12"	13.5"	12"	15" x 22"	-	80	16"	55
18-30	2'-6"	12"	13.5"	15"	15" x 28"	-	97	16"	65
18-36	3'-0"	12"	13.5"	18"	15" x 34"	-	115	16"	69
18-24-7	2'-0"	12"	16.5"	12"	15" x 22"	7	80	13"	105
18-30-7	2'-6"	12"	16.5"	15"	15" x 28"	7	97	13"	113
18-36-7	3'-0"	12"	16.5"	18"	15" x 34"	7	115	13"	115
18-24DP	2'-0"	15"	16.5"	12"	15" x 22"	-	100	13"	62
18-30DP	2'-6"	15"	16.5"	15"	15" x 28"	-	120	13"	69
18-36DP	3'-0"	15"	16.5"	18"	15" x 34"	-	138	13"	80
18-24DP-7	2'-0"	15"	19.5"	12"	15" x 22"	7	100	10"	132
18-30DP-7	2'-6"	15"	19.5"	15"	15" x 28"	7	120	10"	135
18-36DP-7	3'-0"	15"	19.5"	18"	15" x 34"	7	138	10"	145

2100 Series

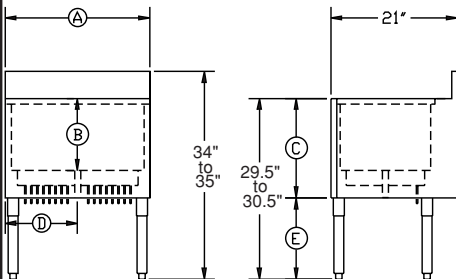

Model Numbers	Length (A)	Bin Depth (B)	Overall Depth (C)	Left Side to Drain (D)	Inside Bin. Dim.	Cold Plate Circuits	Ice Capacity lbs	Leg Size (E)	Weight lbs
21-24	2'-0"	12"	13.5"	12"	15" x 22"	-	80	16"	55
21-30	2'-6"	12"	13.5"	15"	15" x 28"	-	97	16"	65
21-36	3'-0"	12"	13.5"	18"	15" x 34"	-	115	16"	80
21-24-7	2'-0"	12"	16.5"	12"	15" x 22"	7	80	13"	120
21-30-7	2'-6"	12"	16.5"	15"	15" x 28"	7	97	13"	130
21-36-7	3'-0"	12"	16.5"	18"	15" x 34"	7	115	13"	135
21-24DP	2'-0"	15"	16.5"	12"	15" x 22"	-	100	13"	65
21-30DP	2'-6"	15"	16.5"	15"	15" x 28"	-	120	13"	80
21-36DP	3'-0"	15"	16.5"	18"	15" x 34"	-	138	13"	95
21-24DP-7	2'-0"	15"	19.5"	12"	15" x 22"	7	100	10"	150
21-30DP-7	2'-6"	15"	19.5"	15"	15" x 28"	7	120	10"	155
21-36DP-7	3'-0"	15"	19.5"	18"	15" x 34"	7	138	10"	160

Mechanical Requirements:

- 1" IPS Drain Connection without Cold Plate.
- 1/2" IPS Drain Connection with Cold Plate.

Approved By: _____