


OVAL TRAY RACK

Features:

- All aluminum construction
- Easy access to all trays from front and back for convenience
- 6" x 2" pan supports riveted on 6" centers
- Available double wide version
- Ships knocked down

Options:

- Vinyl rack covers
- Perimeter or corner bumpers
- Wheel brakes
- Caster options

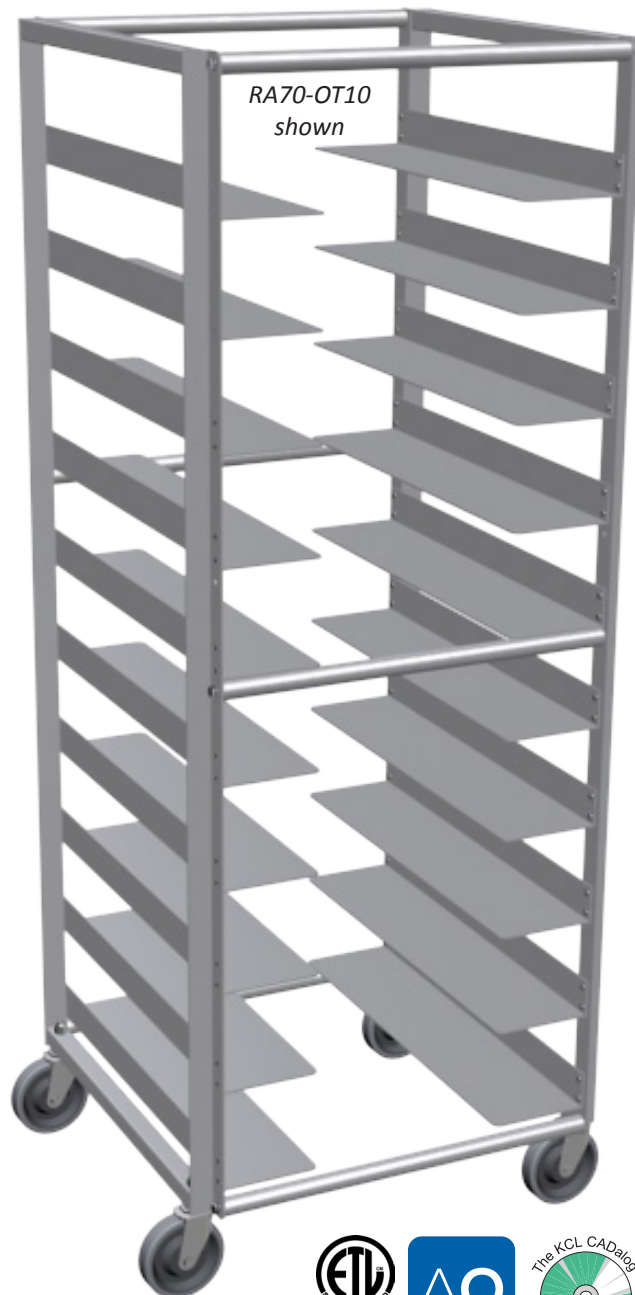



Lockwood Model No.	Angles	Center Spacing	Pan			Exterior Dimensions				Weight
			Capacity	Size		Width	Depth	Height		
RA70-OT10	20	6"	10	18" x 26"	IN	26	26 1/2	69 3/4	LBS	74
					CM	66.04	67.31	177.17	KG	33.57
			20	14" X 18"	IN	26	26 1/2	69 3/4	LBS	74
					CM	66.04	67.31	177.17	KG	33.57
			20	15" X 20"	IN	26	26 1/2	69 3/4	LBS	74
					CM	66.04	67.31	177.17	KG	33.57
			20	12" X 20"	IN	26	26 1/2	69 3/4	LBS	74
					CM	66.04	67.31	177.17	KG	33.57
			40	6" X 18"	IN	26	26 1/2	69 3/4	LBS	74
					CM	66.04	67.31	177.17	KG	33.57
			10	Oval Trays	IN	26	26 1/2	69 3/4	LBS	74
					CM	66.04	67.31	177.17	KG	33.57
RA70-OT10-DW (double wide)	40	6"	20	18" x 26"	IN	52	26 1/2	70 3/8	LBS	153
					CM	132.08	67.31	178.77	KG	69.40
			40	14" X 18"	IN	52	26 1/2	70 3/8	LBS	153
					CM	132.08	67.31	178.77	KG	69.40
			40	15" X 20"	IN	52	26 1/2	70 3/8	LBS	153
					CM	132.08	67.31	178.77	KG	69.40
			40	12" X 20"	IN	52	26 1/2	70 3/8	LBS	153
					CM	132.08	67.31	178.77	KG	69.40
			80	6" X 18"	IN	52	26 1/2	70 3/8	LBS	153
					CM	132.08	67.31	178.77	KG	69.40
			20	Oval Trays	IN	52	26 1/2	70 3/8	LBS	153
					CM	132.08	67.31	178.77	KG	69.40

Rack Specifications:

- Uprights: 1/8" x 1 1/2" x 1 1/2" aluminum angle
- Spacer Bars: .083" x 1 1/8" round aluminum tube with steel thread insert
- Casters: (4) 5" x 1 1/8" High Tech gray non-marking threaded stem casters; load capacity 135 lbs each (61.23 kg); temp. range -45 °/+180° F
- Casters: (Double Wide Configuration) (6) 5" x 1 1/4" plate casters; load capacity 250 lbs (113.40 kg)

Pan Support Specifications:

- 1/8" x 2 1/4" x 6" aluminum

Lockwood reserves the right to change materials and specifications without notice.